

DATA SHEET SPRINGRIDER ALTUS 2 SADDLE

Text for invitation to tender | Item No: 513021402



MATERIALS | SCOPE OF SUPPLY

Springrider, pre-mounted completely


Tubular frame:	stainless steel, V2A
Spring:	torsion spring made of steel with rubber core, 1 piece
Saddle seat:	EPDM caoutchouc with steel inlay, 2 pieces
Handles:	stainless steel, V2A, 2 pieces with caps made of plastic, 4 pieces
Foot rest:	stainless steel, V2A, 2 pieces, with caps made of plastic, 4 pieces
Foundation anchor:	galvanized steel

TECHNICAL INFORMATION

Dimensions:

Main dimension:	1490 x 470 mm
Height:	850 mm
Weight:	36 kg
Capacity:	acc. to normative requirements
Dimension largest piece:	1490 x 500 x 1350 mm
Heaviest piece:	36 kg

Max. fall height:	700 mm
impact area:	9,50 m ²
Required safety slabs:	10,00 m ²
Required lawn grating:	12,00 m ²
Recommended surface material:	grass, sand, wood chip, gravel, synth. impact protection

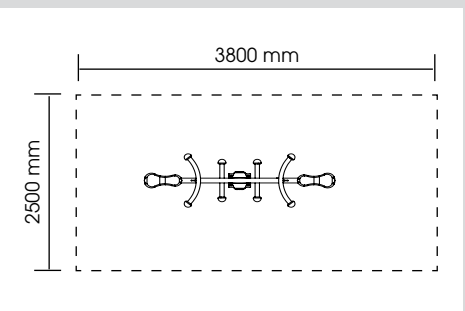

INSTALLATION

Foundations: 1
Modified installation depth possible (special edition)
Installation according to our detailed mounting instructions, see www.stilum.com

