

DATA SHEET SLACKLINE LIXUS MODULAR UNIT 1

Text for invitation to tender | Item No: 516510402



MATERIALS | SCOPE OF SUPPLY

slackline, nearly pre-mounted

tubular frame:	stainless steel, V2A
base plate:	covered with EPDM rubber granule, slip-resistant
handles:	stainless steel, V2A, 1 piece with an element made of caoutchouc and tube end cap made of stainless steel
rope	Herkule rope/plastic, 1 piece
foundation anchor:	metal plate


TECHNIAL INFORMATION

Dimensions:

Main dimension:	5596 x 606 mm
Height:	1696 mm
Weight:	150 kg
capacity:	acc. to normative requirements

Max. fall height:	350 mm
Safety surfacing area:	30,95 m ²
Recommended surface material:	optional The ground should be smooth and free of edges.

Maximum load: 120 kg

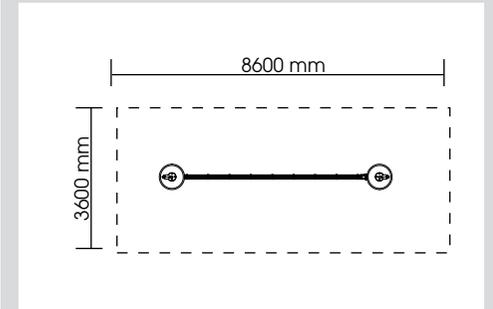

INSTALLATION

Foundations: 2

Installation at concrete surfaces possible (special edition)

Installation according to our detailed mounting instructions, see www.stilum.com

