

PALISADES

PRODUCT COMPOSITION


Rubber granules, PUR binder, lightweight concrete

COLOUR COMBINATION

Full colour range available on request

COLOUR STABILITY

Maximum of 3 on the grey scale

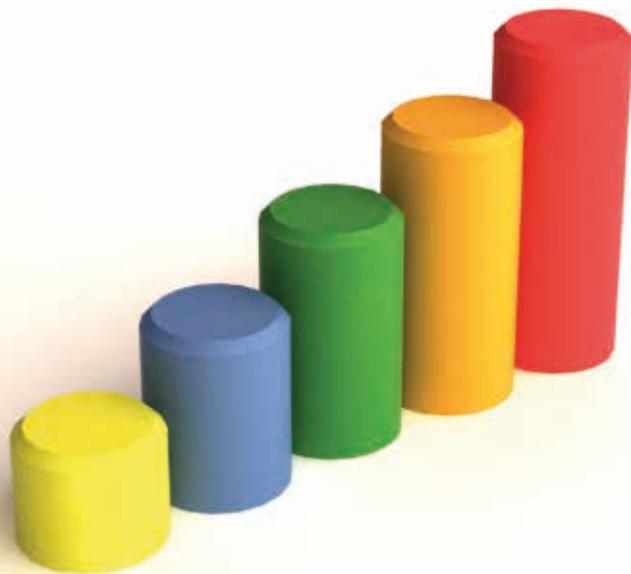

SAFETY SURFACE

No safety area required (according to EN1177)

PRODUCT SAFETY

Certified according to EN1176

INSTALLATION

The product is installed onto a concrete foundation

PACKAGING

Wrapped in plastic and delivered on a pallet of a size according to number of pieces

STORAGE

In original packaging on a pallet in temperatures between - 40° C and 50° C

