C25/21EN

WHALE

PRODUCT COMPOSITION

SBR+EPDM rubber granules, aliphatic PU binder, vandal-resistant fiberglass shell, stainless steel "fin"

COLOR COMBINATION

standard: blue, white, black, green

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

PRODUCT SHEET

product line **CLASSIC**

safety rubber surface in the area of 1500mm around the product (according to EN1177)

PRODUCT SAFETY

certified according to EN1176 complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION


the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered on a pallet 1650 x 2100mm

STORAGE

in original packaging on a pallet in temperatures between – 40° C and 50° C

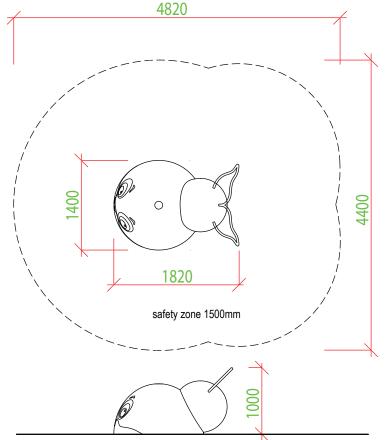

Our products are handmade, please allow dimensional tolerance up to 40 mm

