

HILL L



PRODUCT COMPOSITION

SBR+EPDM rubber granules, aliphatic PU binder, vandal-resistant fiberglass shell

COLOR COMBINATION

standard: green, dark green, ochre
(other combination on request)

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

safety rubber surface

(no safety area required according to EN1177)

PRODUCT SAFETY

certified according to EN1176

complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION

the product is installed onto a concrete foundation

PACKAGING



wrapped in plastic and delivered

on a pallet 1650 x 2100mm





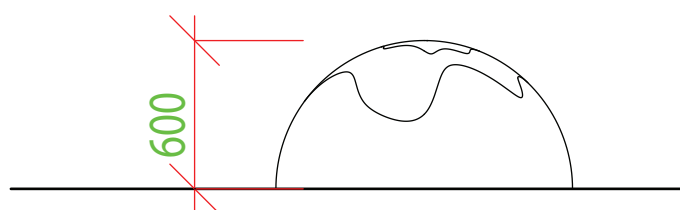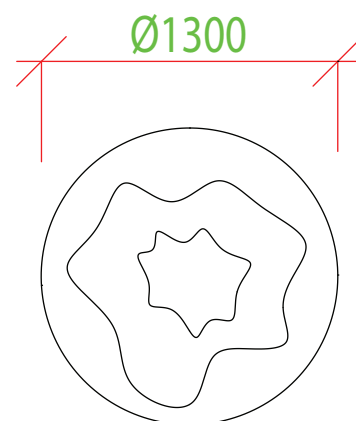

STORAGE

in original packaging on a pallet

in temperatures between - 40° C and 50° C



Our products are handmade, please allow dimensional tolerance up to 40 mm

 80 kg weight	 <600 mm critical fall height	 1 h assembly time	 2 - 10 yrs users' age	 3 max. number of users	 Ø1300 mm h=600 mm
---	---	---	---	--	--

3D PROGRAM, s.r.o.

Objízdná 1911

765 02 Otrokovice

Czech Republic



MADE IN EU

www.3dprogram.eu

info@3dprogram.eu

+420 602 500 045 +420 577 700 718

