

ASSEMBLING INSTRUCTION

Disc Caroussel

Cat no: 3211

Age range: 3-14 years

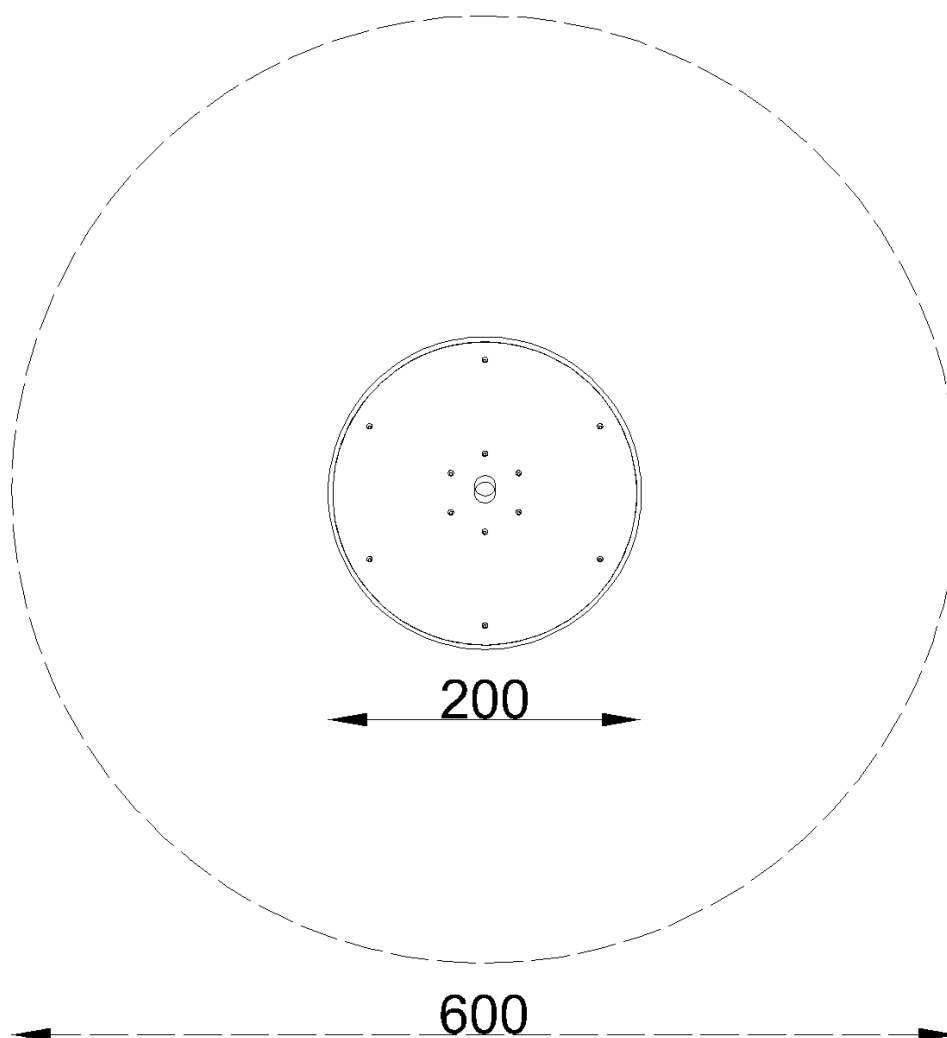


GENERAL INFORMATION

Instruction is made according to PN-EN 1176-1: 2009 point 6 point 7, PN-EN 1176-3: 2009, PN-EN 1177:2009

TOOLS REQUIRED FOR ASSEMBLY**Suggested number of people: 3**

1	Ratchet Wrench	
2	Socket 19 mm	
3	Socket 17 mm	
4	Hammer	
5	Measuring tape 5 m – 2 psc	
6	Spirit level 60 cm	
7	Spirit level 100 cm	
8	Spade	
9	Rake	
10	The protective tape	
11	Bit PZ2	
12	Screwdriver	
13	Drill 7 mm	
14	Path to transfer levels 2,5 m	
15	Strip for leveling pits in the ground 1,5 m - 2 pc.	
16	Levelling instrument	

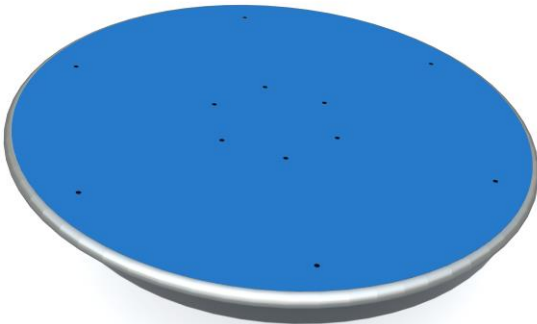
TOP VIEW OF THE SET AND SAFETY ZONE

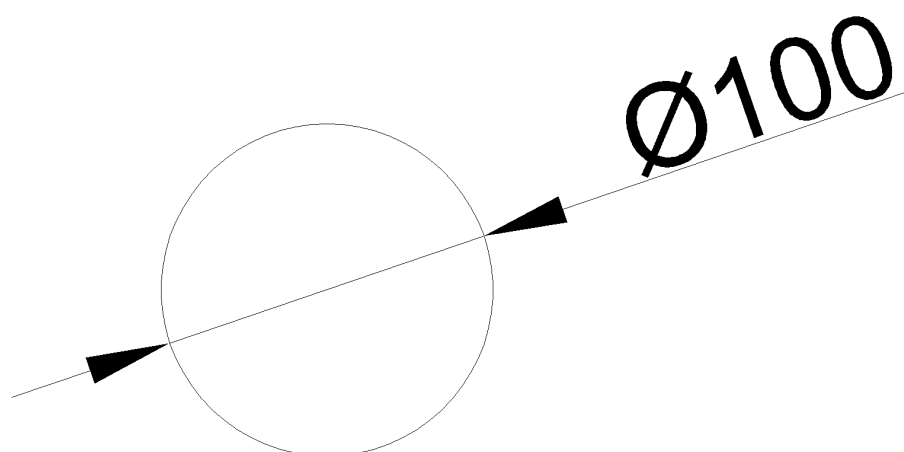
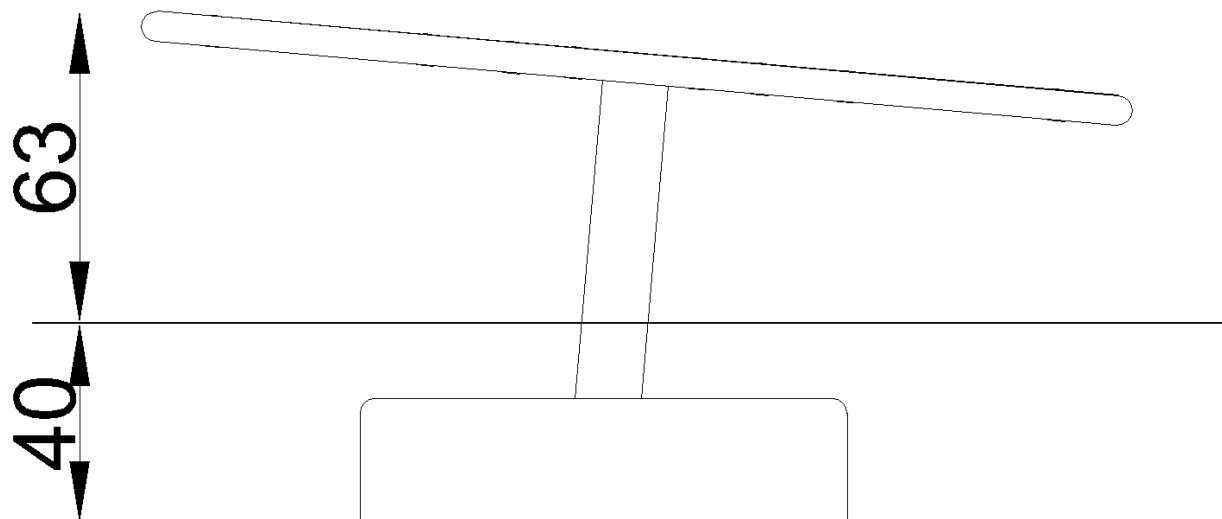
Safety surface			
Zone	Max height of fall	Surface area	Perimeter of safety zone.
A	0,63 m	29,0 m ²	19,0 m

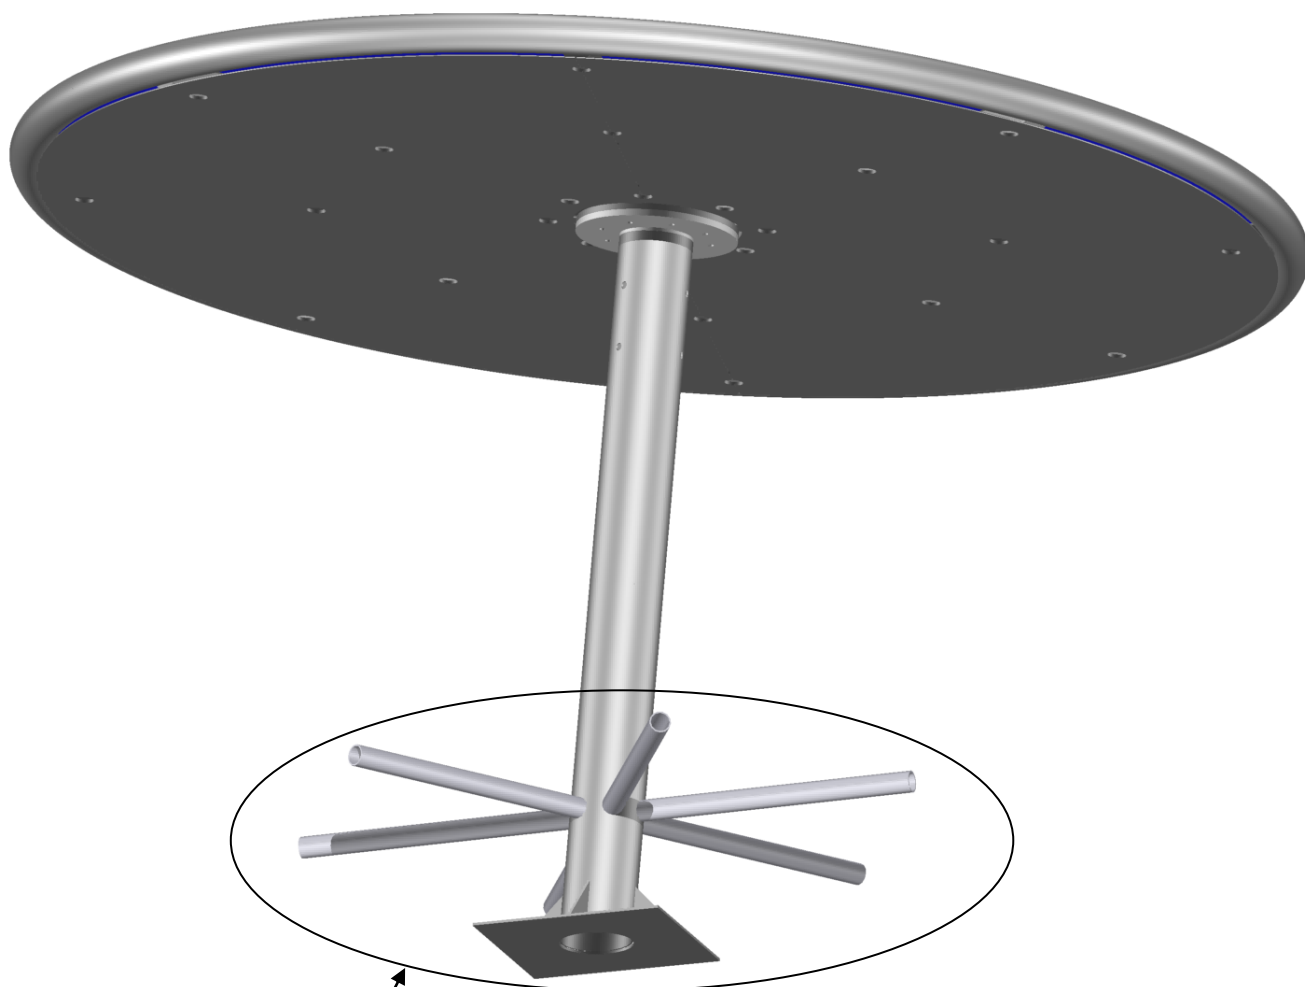
Safety surface on the entire area with risk of fall can be made from the following material (the thickness of surface has been chosen for appropriate height of fall from Table 4, BS EN 1176-1:2009):

- Turf/top soil groomed, flexible,
- The sand fraction 0.2 ÷ 2mm,
- Gravel aggregate fraction 2 ÷ 8 mm,
- Bark fraction 20 ÷ 80 mm,
- Saw dust fraction 5 ÷ 30 mm,
- Synthetic material conforms to EN 1177.

COMPONENTS

.	Element		No	Pcs
1	Carousel		3211	1

PLACEMENT OF EXCAVATIONS FOR FOUNDATIONS

STEP BY STEP ASSAMBLING**1**

Anchoirs with base flooded with the concrete !

NOTE:

Carousel with a concrete foundation should be placed in a prepared trench at 40 cm below ground.

The hole diameter is 100 cm.