


ART. NO 7510
ROTATABLE CLIMBING PYRAMID

CLIMBING PYRAMID

RING

GROUND LEVEL

CONCRETE FOUNDATION

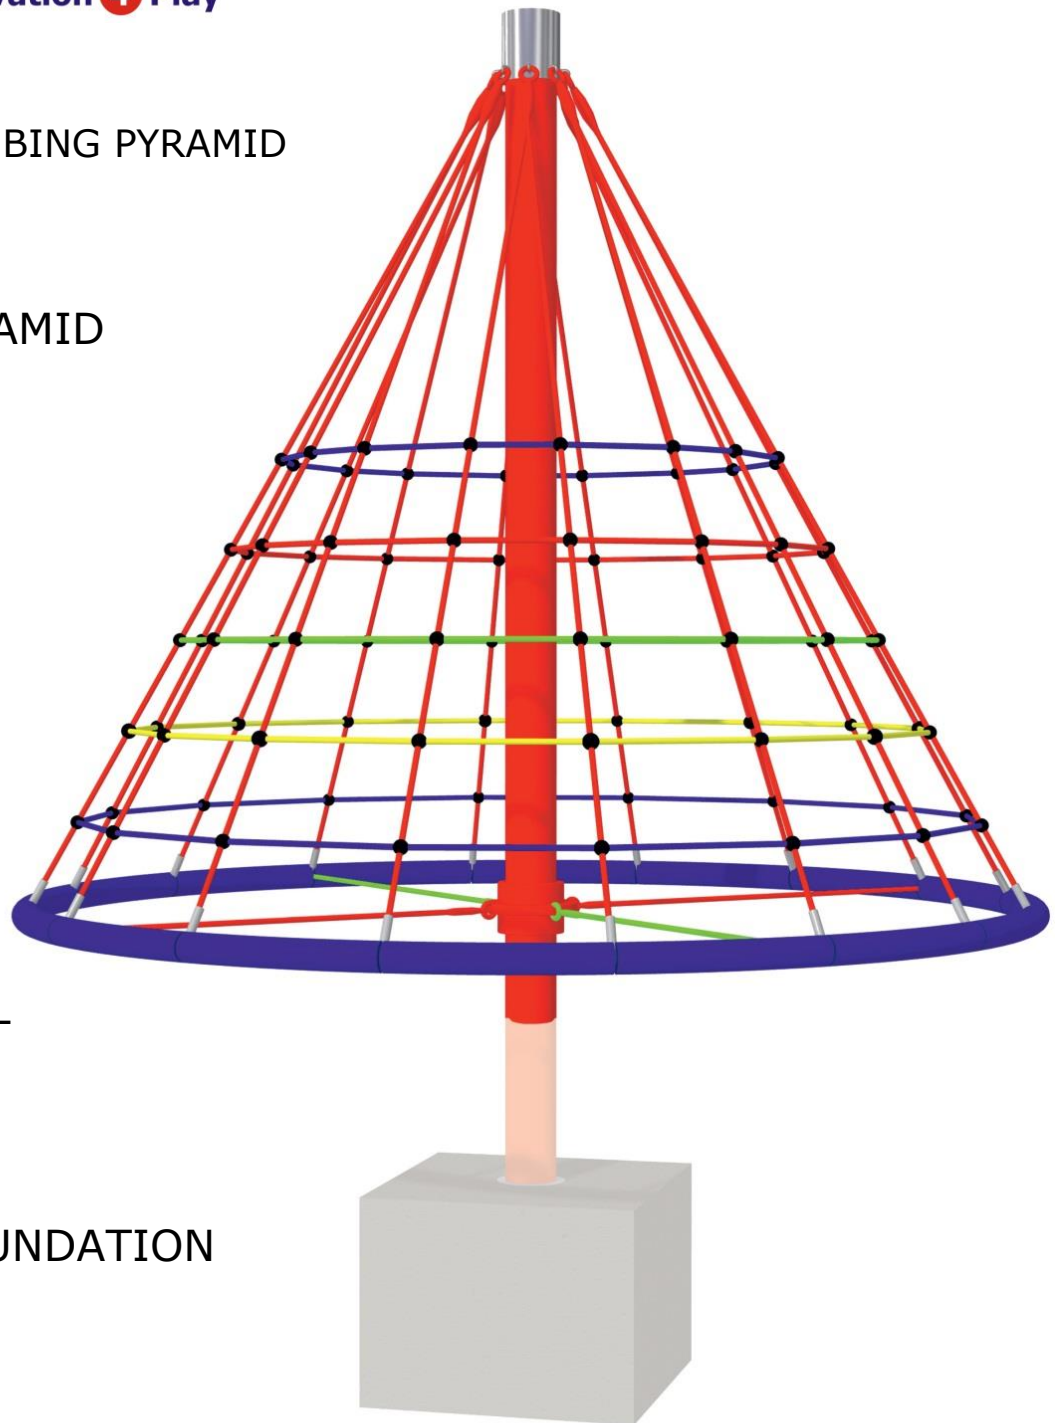

SPECIFICATIONS

HEIGHT OF MAST:	3000MM ABOVE GROUND LEVEL,
SURFACE OF MAST:	HOT DIP GALVANIZED AND POWDER COATED
DIAMETER OF RING:	3000MMM, PLACED 400MM ABOVE GROUND LEVEL
MATERIAL:	HERCULES PPM ROPE
SAFETY AREA:	Ø8000MM (APPROX. 50,30 M2), FALL PROTECTION ACCORDING TO EN-1177



CLIMBING PYRAMID

RING

GROUND LEVEL

CONCRETE FOUNDATION

CONCRETE FOUNDATION

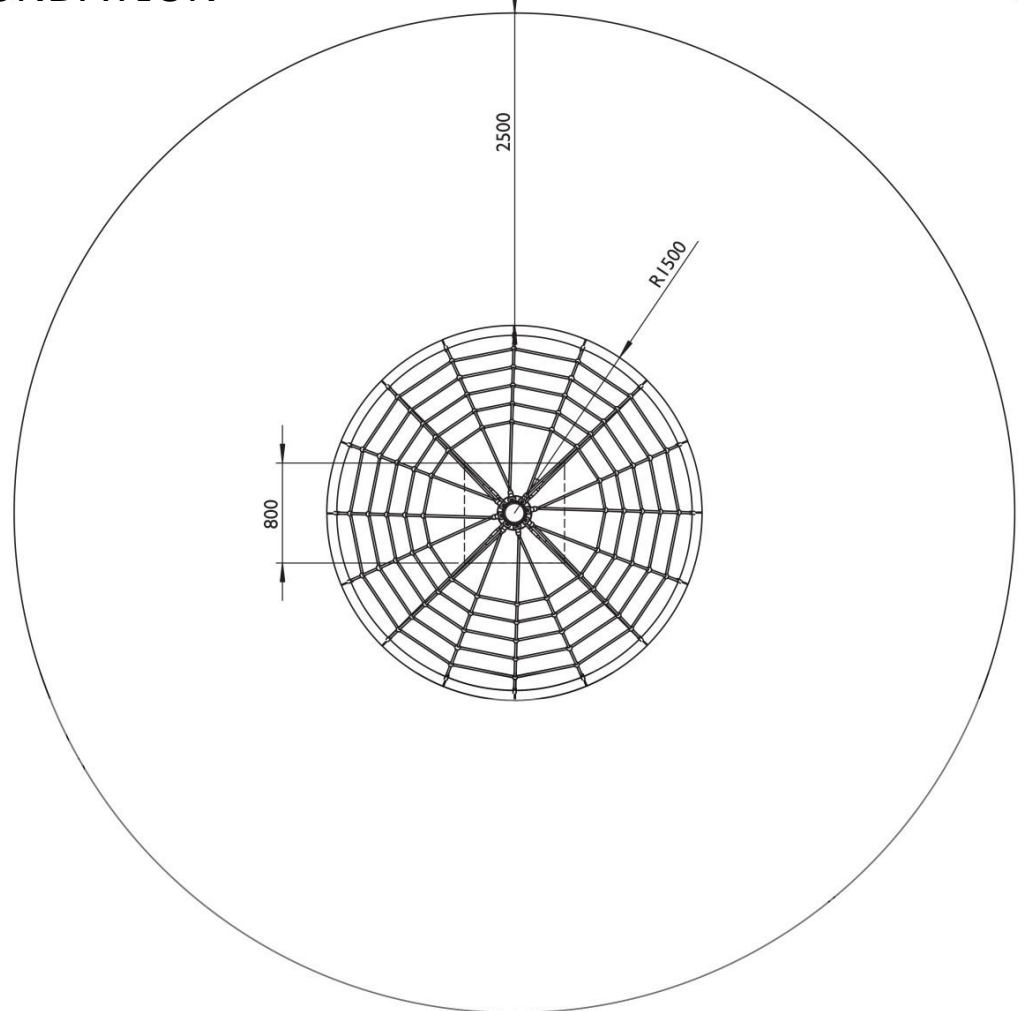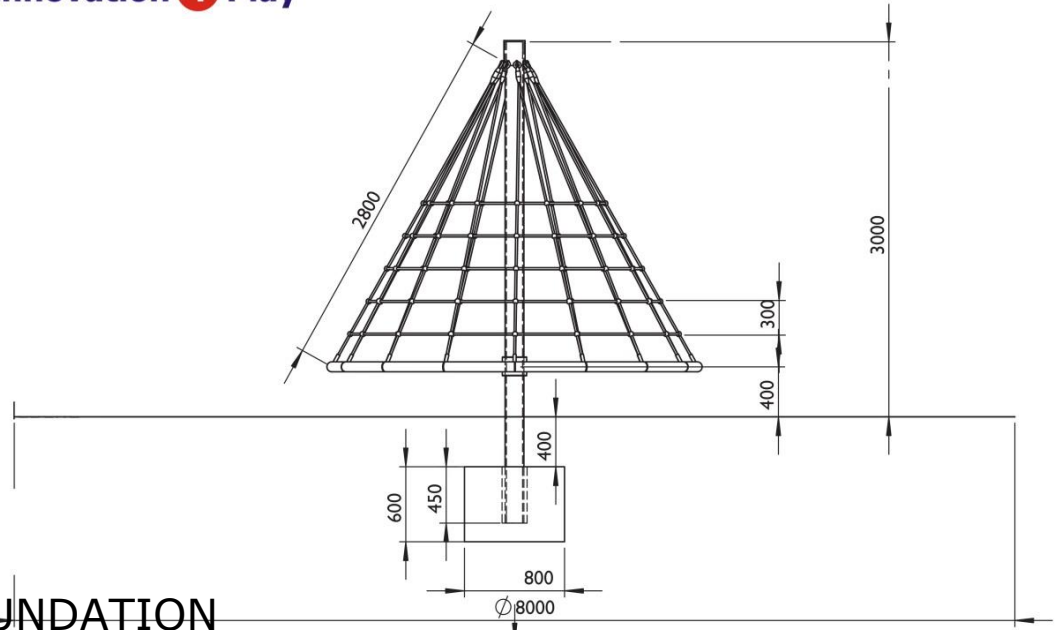

SPECIFICATIONS

- HEIGHT OF MAST: 3000MM ABOVE GROUND LEVEL,
- SURFACE OF MAST: HOT DIP GALVANIZED AND POWDER COATED
- DIAMETER OF RING: 3000MMM, PLACED 400MM ABOVE GROUND LEVEL
- MATERIAL: HERCULES PPM ROPE
- SAFETY AREA: Ø8000MM (APPROX. 50,30 M2), FALL PROTECTION ACCORDING TO EN-1177