

01
ŞABLON

DGSS 17 C-SS 67



YAŞ



GERİ DÖNÜŞÜM



DÜŞME
YÜKSEKLİĞİ



DÖNÜŞ



OTURMA



KAPASİTE

Cemer®



GÜVENLİK ALANI



YAN GÖRÜNÜŞ

ZEMİN ÇİZGİSİ



ÖN GÖRÜNÜŞ

ZEMİN ÇİZGİSİ

02
GÖRÜNÜŞLER

DGSS 17 C-SS 67



YAS



GERİ DONUŞUM



DÜŞME
YÜKSEKLİĞİ



DONUŞ




OTURMA




KAPASİTE

Cemer®

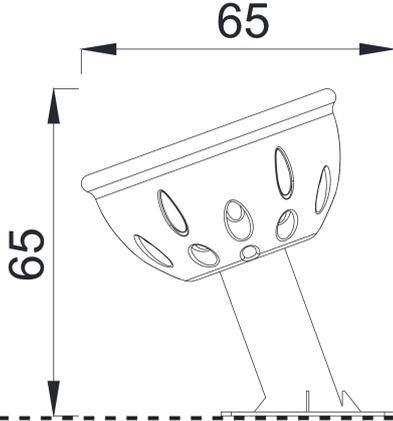


ÖN GÖRÜNÜŞ

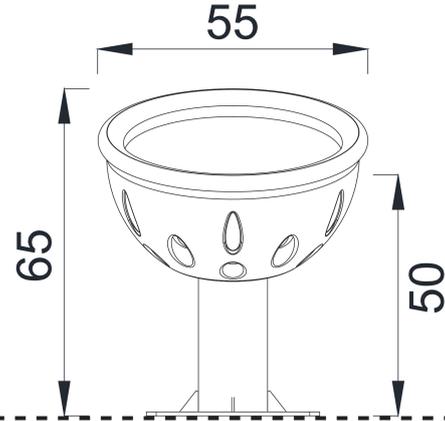

YAN GÖRÜNÜŞ

ZEMİN ÇİZGİSİ

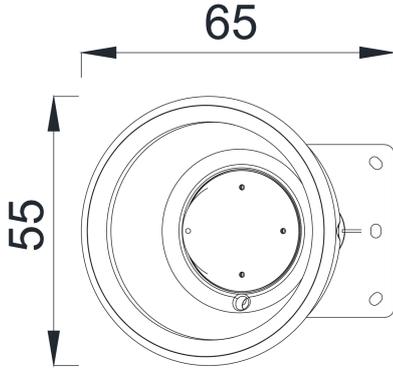

ÜST GÖRÜNÜŞ

Product Specification "Metal Series"

Main Mast (Post):



- Metal masts and other metal parts (Wherever available) are made of ST37 steel.
- Metal finish consists 3-layer execution,
 - Shot Blasting
 - Zinc-Rich Primer Coating
 - Powder Coating
- Products within the range are designed to fix ground via square flanges.

Polyethylene Parts:



- Rotomolded polyethylene (LLDPE) and manufactured in aluminum molds in double walls. The wall thickness of polyethylene parts is between 4-6 mm.
- Polyethylene is fire retardant and strengthened against UV.
- Hardcovers are injection molded.
- Polyethylene is fire retardant and strengthened UV protected.

High-Density Polyethylene Sheets:



- 15-19 mm dual color triple layer high-density polyethylene sheets (HDPE) are used in this range.
- HDPE sheets are formed with CNC and router machines for precise dimensions.
- HDPE is fire retardant and strengthened UV protected.
- Anti-skid 19 mm HDPE is used for the surface of DGSS 26 and DGSS 27.

Armed Rope:



- Own production 16 mm. Diameter polyamide 6 (nylon) and braided armed ropes are used to construct net climbing accessories in the product group.
- Each armed rope has 6 strands, and these strands are built on a core. Each strand is built with braided polyamide on steel wires. The core of the rope can either fiber or steel depending on the loading requirement.
- Breakpoints ropes mentioned above are as follows.

16 mm. FC	3980 Kgs.	16 mm IWRC	5820 Kgs.
-----------	-----------	------------	-----------

- Note: FC (Fiber Core) IWRC (Steel Core)
- Armed ropes have UV resistance and Flame Retardancy.

Swing Seats:



- Toddler seats are made of rotational molding polyethylene and coated with rubber shock absorbers.
- Bird nest seats are manufactured from a particular type of polyethylene which is a shock absorber itself with its unique design.
- Hemp Rope swing is made of 14 cm thick with steel reinforcement inside.

Platform



- Platforms are made of ST37 metal Sheets and dipped into plastic for further protection of users.

Ball Bearing System:



- The system is located in 5" and 6" pipes.
- Working principle depended on having the lower body stable and fixed while upper body allows the equipment spin.

- Ball bearing system is connected upper and lower body by 12 mm bolts.
- In radial movement system two conic ball bearings shall be used, to lock the system counter nuts and tab nuts shall be used.
- All system is stainless steel
- System speed is adjustable.
- For smaller systems, the small version steel bearing system is used. (C-SS 67, C-SS 52 and DGSS 01)

Torsion:

- For balance equipment, Rosta™ torsions are used.

Connectors:



- Stainless Steel connectors are used at rope ends where rope element fixed to the primary structure.
- Polyamide connectors are used to combine armed ropes.
- Aluminum Cast connectors are also used at rope ends where rope element fixed to the metal frame.
- The patented functional connector provides multi-connection to masts. Steelwork is covered with aluminum and polyamide.

Bolts and Nuts:

- All bolts, nuts washers are stainless steel or coated with DACROMET® due to size and use.

General Notes

- $\pm 5\%$ deviation may occur in the size and weight of products within the range.
- CEMER keeps rights to make any technical and price changes