

01
ŞABLON

DGHS ASTERO 103



YAŞ



GERİ DÖNÜŞÜM



DÜŞME
YÜKSEKLİĞİ



OTURMA






TIRMANMA



KAPASİTE

Cemer®

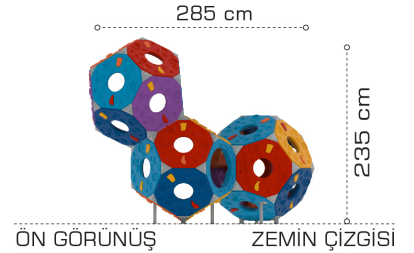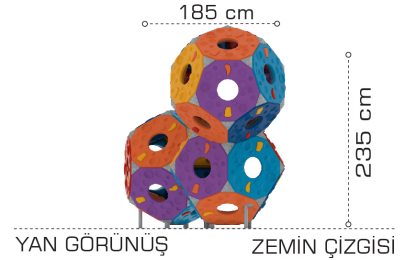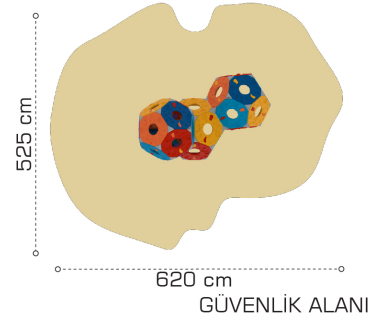



YAŞ



GERİ DONUŞUM



DÜŞME
YÜKSEKLİĞİ




OTURMA



TIRMANMA



KAPASİTE

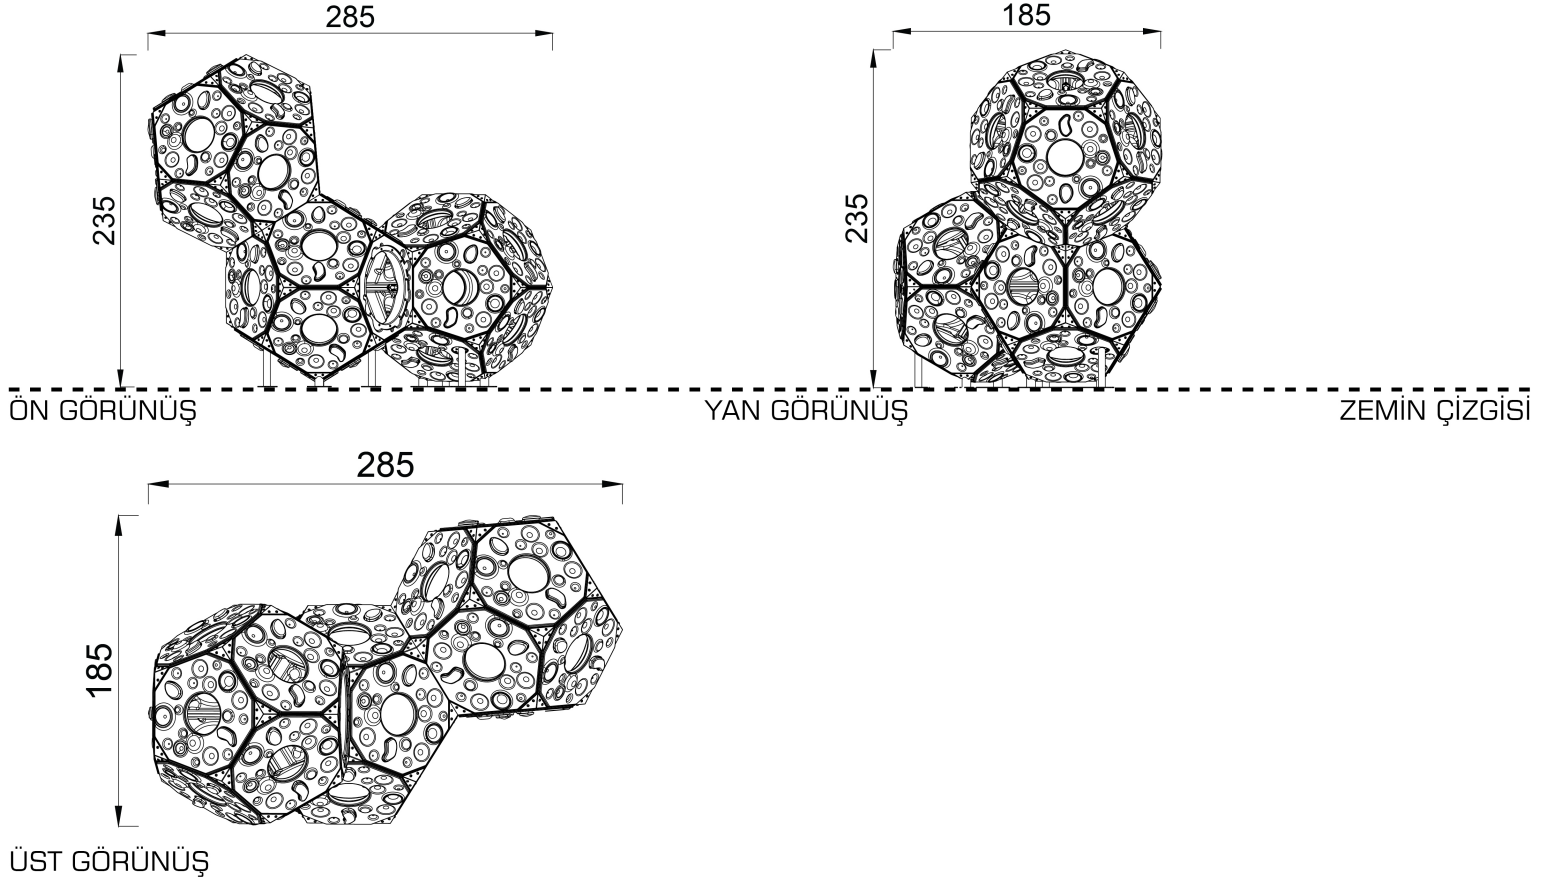


Product Specification "Astero®"

Polyethylene Parts:

ASTERO® is designed and manufactured from prisms that consist of polygon prisms stations connected to each other.

- Polyethylene raw material is antistatic and non-flammable. Polyethylene is fire retardant and strengthened against UV.
- ASTERO® is made of rotomolded polyethylene (LLDPE) and manufactured in aluminum molds in double walls.
- Chrome skeleton and PE material connections shall be made with special bolts and nuts to prevent accidents and protect item.
- PE material will be produced in color itself and no paint process will be applied on the product.

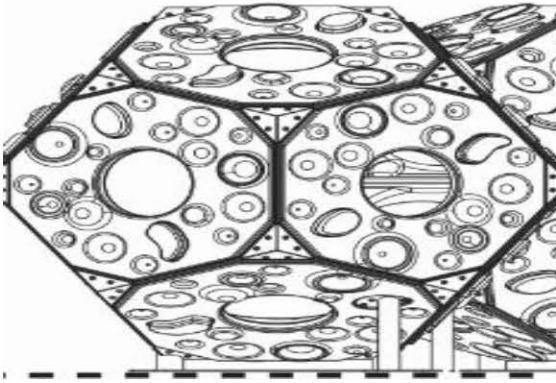

Bolts and Nuts:

- Bolts and nuts used at the equipment are alkaline coating and torx pan head.
- Injection molded parts hide bolts and nuts wherever available.

Metal Parts:

- The product is anchored to ground via flanges.
- ST 37 steel plates are shot blasted, zinc rich primer powder coated before electrostatic powder coating finish.
- On both plates, there are fixing points to be anchored to concrete slabs or extension for in-ground installation

General Notes

- ± 5 % deviation may occur in the size and weight of products within the range.
- CEMER reserves the right to make any technical and price changes