




Terrasoft® Sandpit syra

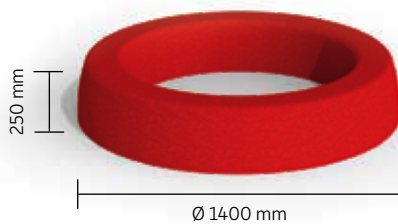

Sandpits are the most popular play structure on the playground or in the home garden, because children as young as 1 year old become little cake makers or great builders. It is there that you first learn proportions as well as the rudimentary knowledge of physics, in which sand trickles through your fingers or takes on new shapes.

The syra sandpit combines everything in one: the round play element is made of high-quality EPDM rubber granulate, which provides a permanently soft and warm seating surface as well as an anti-slip surface - for fun all year round.

ADVANTAGES

- easy and quick installation
- low maintenance
- robust
- soft and warm surface
- numerous colour alternatives
- attractive play element
- for children from 1 year on

APPLICATION

Simply ingenious - ingeniously simple! The play and seating elements are unique design elements for the outdoor area. Colourful playscapes can be created in nursery schools or inner-city areas.



Gluing the sandpit syra to solid substrates.

INSTALLATION INSTRUCTIONS

The sandpit is placed on the existing surface (firm solid substrates) and glued in accordance with the Terrasoft gluing instructions. We recommend the use of synthetic fall protection.

	Weight	Max fall height	Impact area	Required safety slabs
syra	130 kg	250 mm	Ø 4400 mm	20,25 m ²

MAINTANANCE INSTRUCTIONS

Preparation of the subsoil

Please pay attention that the adhesion areas are free from oil, grease and other residues e.g. colour, rubber adhesion, etc.

Preparation of the cartridge

Push the membrane in to the threaded piece and screw on the cut-to-size plastic nozzle. Then remove the bottom plate of the cartridge with a screw driver and insert the cartridge by hand or with a compressed air pistol.

The adhesion follows on a complete cleaned subsoil with gluing points on the bottom of the element.

The surface and environment temperature must be at least 5°C. The elements should only be installed in dry weather conditions. Adhesive cartridges should not be stored under 10°C.

Please pay attention that the element is not moved for 48 hours.

Colours



-31 signal yellow
-32 signal green
-34 signal red
-23 blue

Specifications



MAINTENANCE INSTRUCTIONS

Quarterly operative inspection:

Check the play and safety area for obvious safety hazards and cleanliness (e.g. exposed foundations, missing or damaged parts, missing or insufficient impact absorption, broken pieces, dirt etc.).

Check the play area for cleanliness and damages.

Protruding elements, if there are any, have to be removed. Check the installation depth. If necessary fill up the installation depth to the mark „play level“.

Check the equipment for cleanliness, correct functioning, wear, stability and damages. Check all the fixing elements and retighten them if necessary. In case of damages, replace the damaged elements.

Annual main inspection (in intervals of not more than 12 months):

In addition to the checks of the operative inspection, pay special attention to the stability of the equipment (which may be affected due to corrosion or vandalism) and its operational safety, especially after repair works or after mounting new elements or replacing existing elements. For that purpose, it may be necessary to uncover the foundations.

Attention!

The maintenance intervals mentioned above are to be understood as recommendations. The frequency of inspections has to be increased accordingly in case of intensive use of the equipment, extreme weather conditions, installations near the coast or in places which are often subject to vandalism and depending on the age of the equipment.

In addition to the maintenance recommendations given by the manufacturer, it is also absolutely necessary to follow the regulations stipulated in DIN EN 1176-7!

When exchanging or repairing elements, please always use original spare parts for the sake of operational safety and for liability reasons!

If the play equipment has been incompletely installed or partly dismantled when carrying out maintenance and repair work, this may lead to particular risks of injury for the user. For this reason, make clearly visible that the equipment shall not be used in such cases!

We recommend our basic cleaner.