




TERRASOFT® | CYLINDER

The language of form is simple, classic and indispensable in today's cityscape. The Terrasoft cylinders are very simplistic in design and yet very impressive. If several elements are put together, plazas or pedestrian zones quickly become communication zones and meeting places for young and old. Made entirely of pure SBR rubber granules and coated with PU, the Terrasoft cylinder offers both in summer and winter a pleasantly soft and warm seat. On the one hand, public spaces can be given a visual division of space with the aid of this design feature; on the other hand, it is often used to give paths and plazas an optical edge.

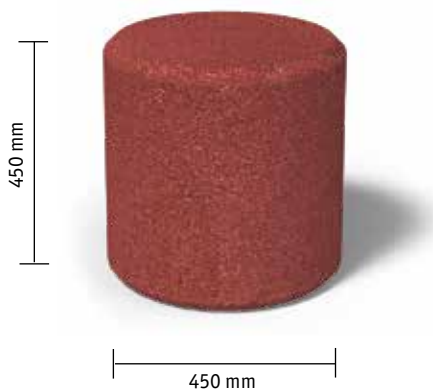

ADVANTAGES


- easy and rapid installation
- low maintenance
- robust
- creative element for inner-city areas
- attractive seating
- Play element

APPLICATION

The Terrasoft cylinder finds a use in numerous areas: whether as a border element for driveways and paths or as a seat, for example, in public plazas. Several cylinders create unique balancing courses and an imaginative combinations of games.



*with Floor anchor
Item no. 2565000109*

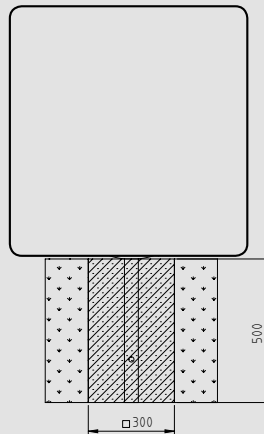

Cylinder embedded in concrete by means of the ground anchors.

INSTALLATION INSTRUCTIONS

Cylinder without grounds anchors

are placed on the existing surface and glued to it according to the gluing instructions.

Cylinder with ground anchors

can be embedded with the ground anchors into the prepared concrete foundations to fix them permanently.

ADHESION

Preparation of the subsoil

Before installing, the subsoil must be compressed and fixed. Please pay attention that the adhesion areas are free from oil, grease and other residues e.g. colour, rubber adhesion, etc.

Preparation of the cartridge

Push the membrane in to the threaded piece and screw on the cut-to-size plastic nozzle. Then remove the bottom plate of the cartridge with a screw driver and insert the cartridge by hand or with a compressed air pistol.

The adhesion follows on a complete cleaned subsoil with glueing points on the bottom of the Cylinder.

The surface and environment temperature must be at least 5 °C. The Cylinder should only be installed in dry weather conditions. Adhesive cartridges should not be stored under 10 °C. Adhesive cartridges should not be stored under 10 °C.

Please pay attention that the Cube is not moved for 48 hours.

Colours



-10x
redbrown

-12x
green

-13x
anthracite

Specifications



16 Pcs.