


Maintenance instructions for toddler element „valis rotus“

Item No. 35 2315 xx1 / 35 2328 xx1



Item No. 35 2315 xx1

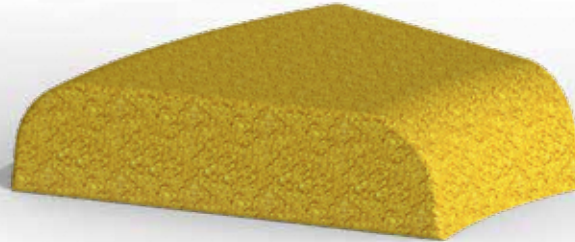

Item No. 35 2328 xx1

Quarterly operative inspection:

1. Check the play and safety area for obvious safety hazards and cleanliness (e.g. exposed foundations, missing or damaged parts, missing or insufficient impact absorption, broken pieces, dirt etc.).
2. Check the play area for cleanliness and damages. Protruding elements, if there are any, have to be removed. Check adhesion.
3. Check the equipment for cleanliness, wear, stability and damages. In case of damages, replace the damaged elements.

Annual main inspection

(in intervals of not more than 12 months):

In addition to the checks of the operative inspection, pay special attention to the stability of the equipment (which may be affected due to vandalism) and its operational safety, especially after repair works or after mounting new elements or replacing existing elements. For that purpose, it may be necessary to uncover the foundations.

Attention!

The maintenance intervals mentioned above are to be understood as recommendations. The frequency of inspections has to be increased accordingly in case of intensive use of the equipment, extreme weather conditions, installations near the coast or in places which are often subject to vandalism and depending on the age of the equipment.

In addition to the maintenance recommendations given by the manufacturer, it is also absolutely necessary to follow the regulations stipulated in DIN EN 1176-7!

When exchanging or repairing elements, please always use original spare parts for the sake of operational safety and for liability reasons!

After laying we recommend initially cleaning the surface with our special floor cleaning agent.

For all subsequent surface treatments we recommend using the grease-free active cleaning agent.