


LAPPSET®

MOOMIN

ASENNUSOHJE
MONTERINGSANSVISNING
INSTALLATION INSTRUCTION
AUFBAUANLEITUNG
NOTICE D'INSTALLATION

DATE: 30.9.2021


MP0203

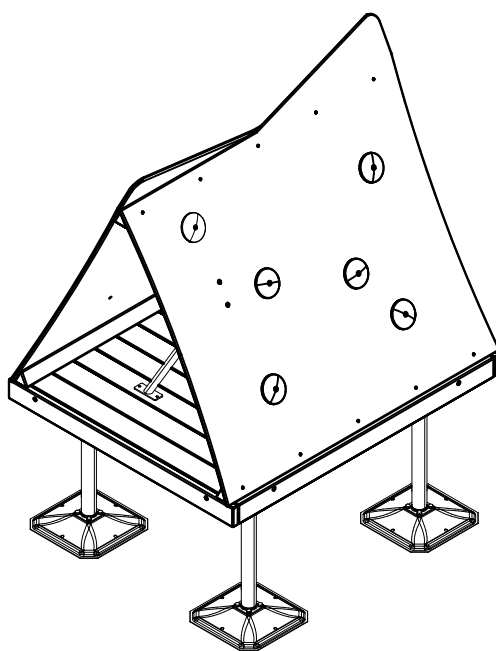


DATE: 24.9.2020



[illegible]



EN/AS Impact Area 17.4 m²


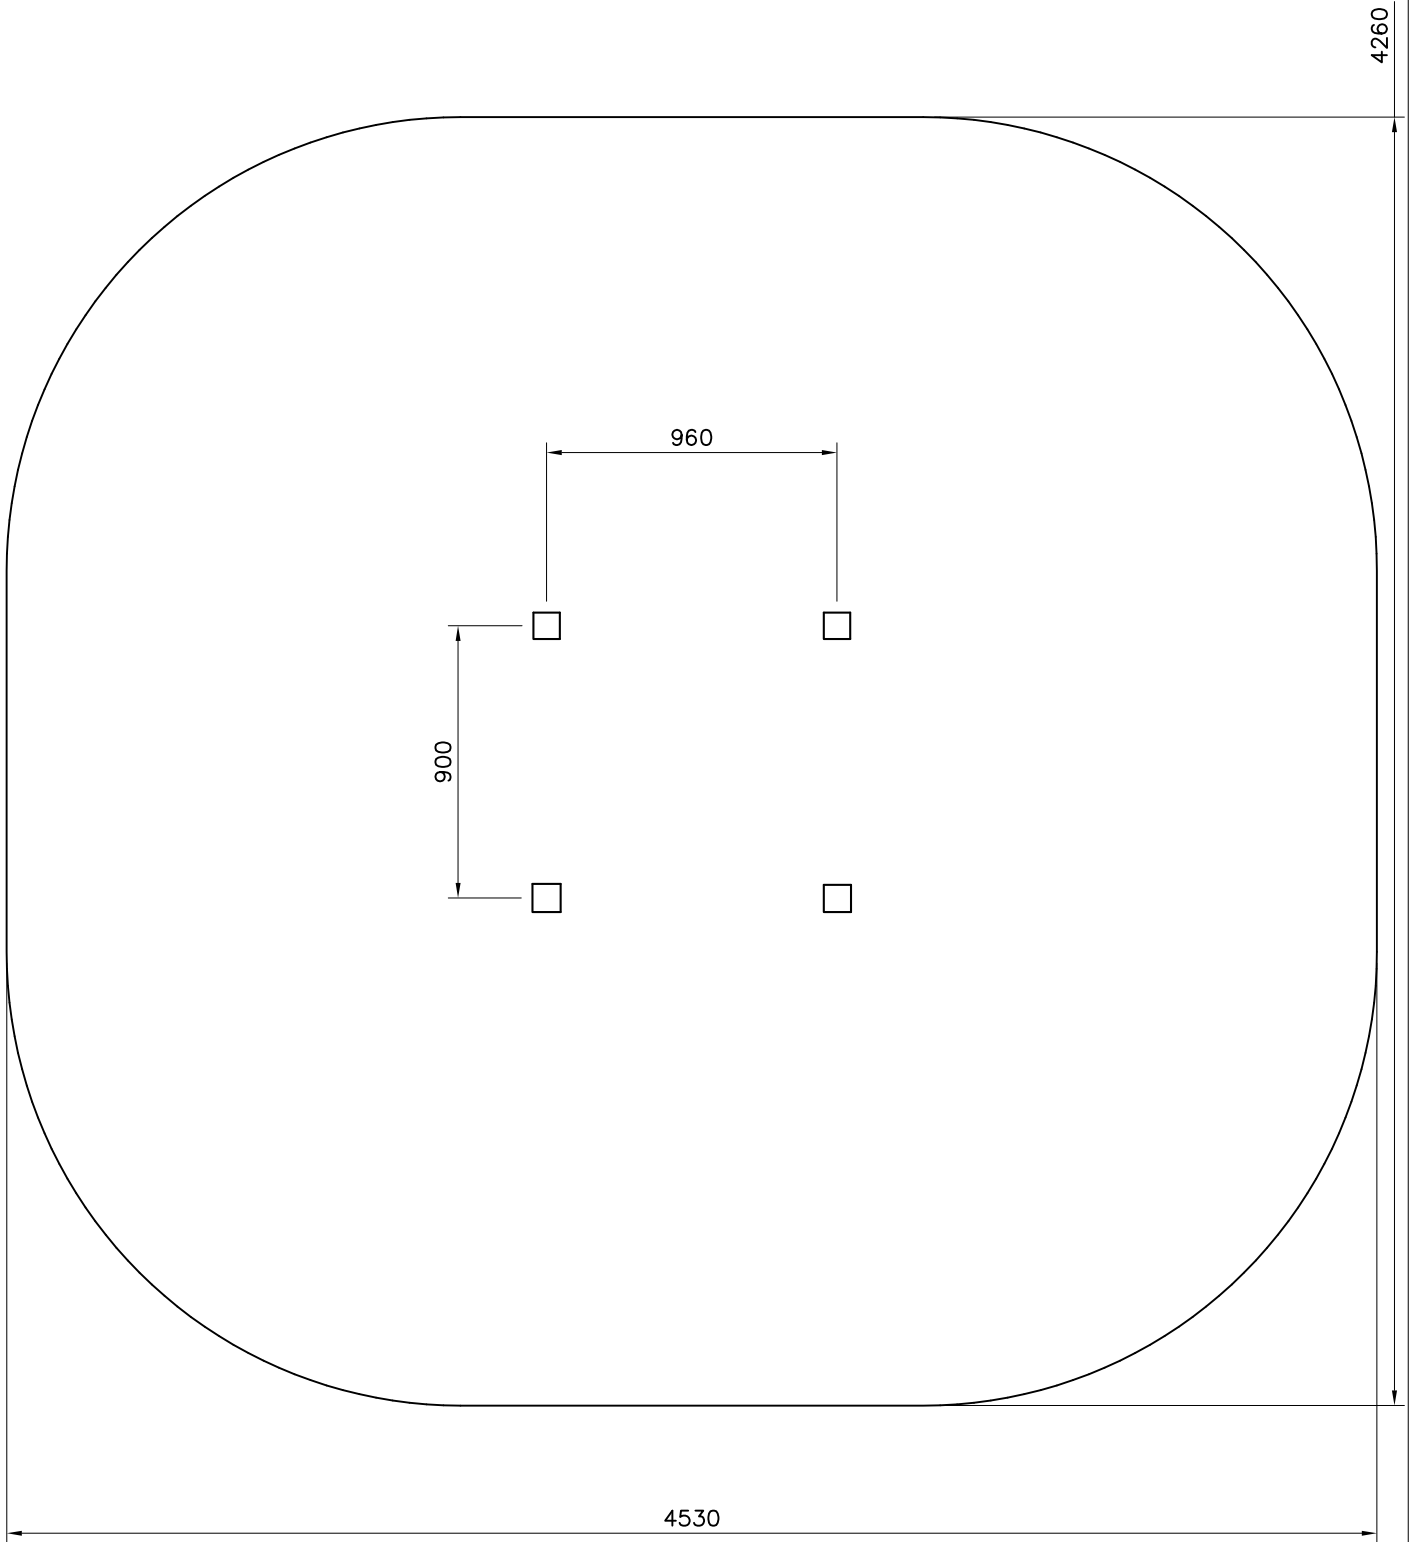


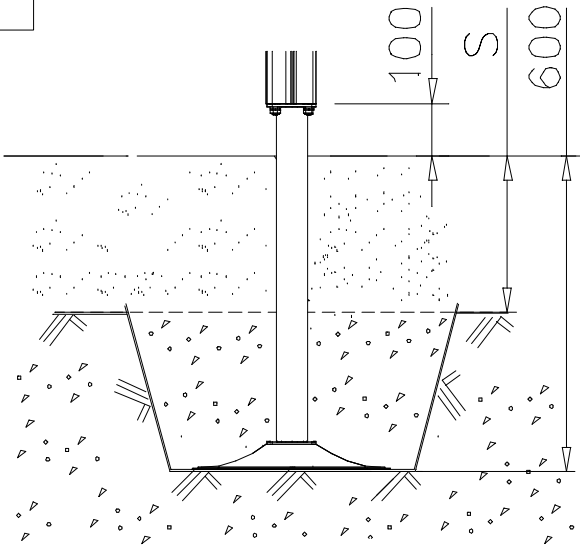
- EN/AS Impact Area 17.4 m2
- - - - Falling Space 17.4 m2
- Max Falling Height 1340 mm



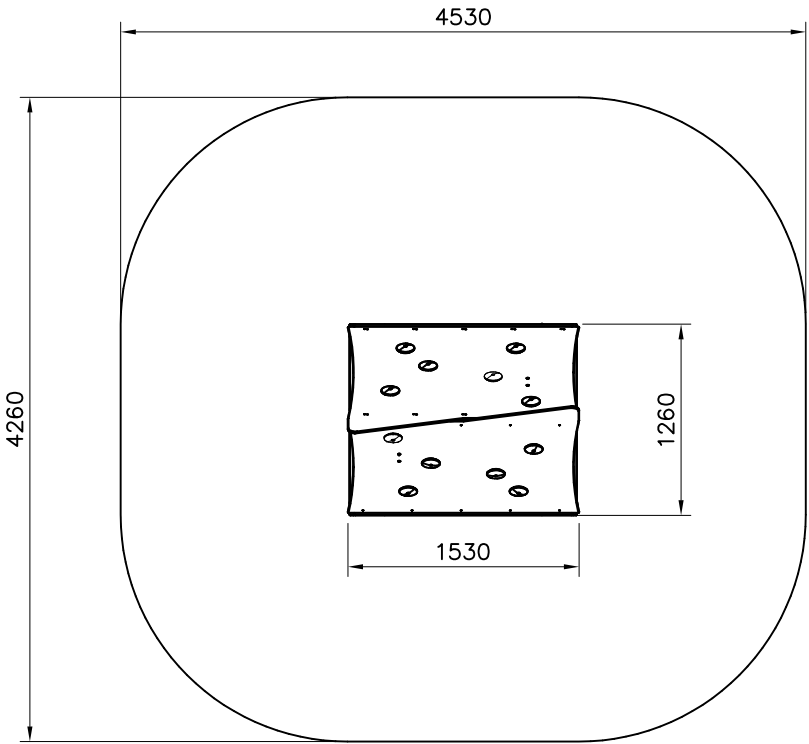


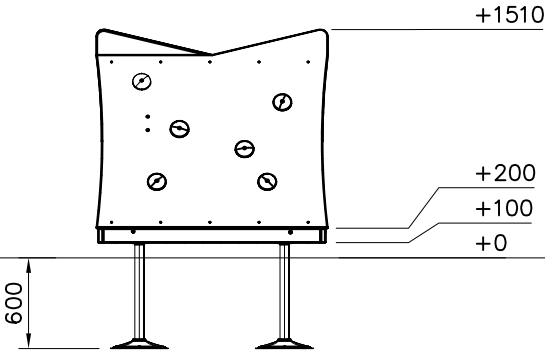

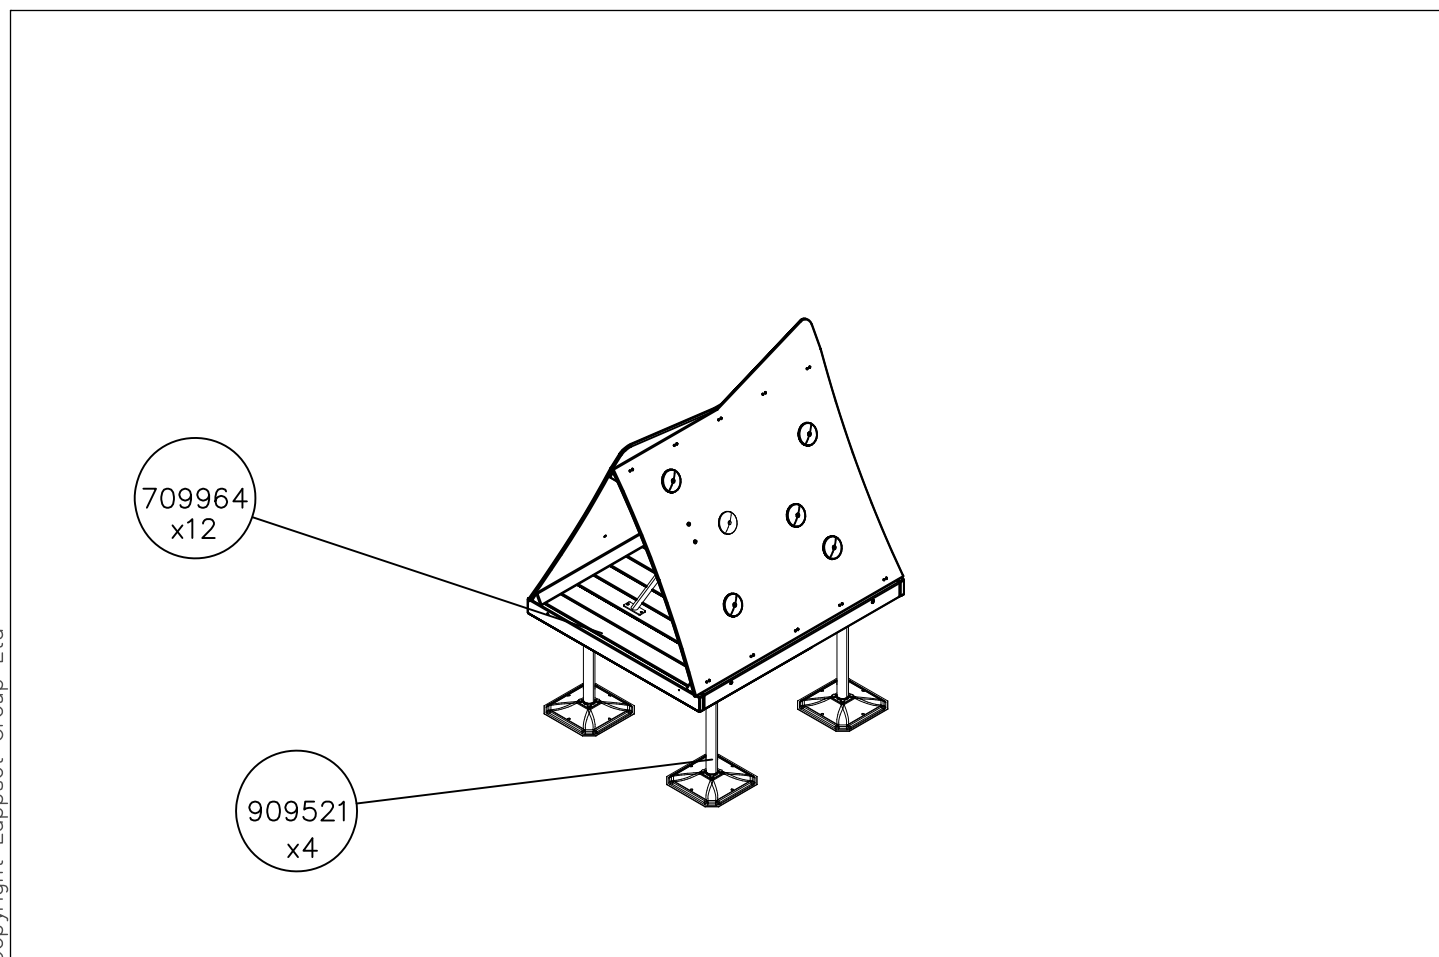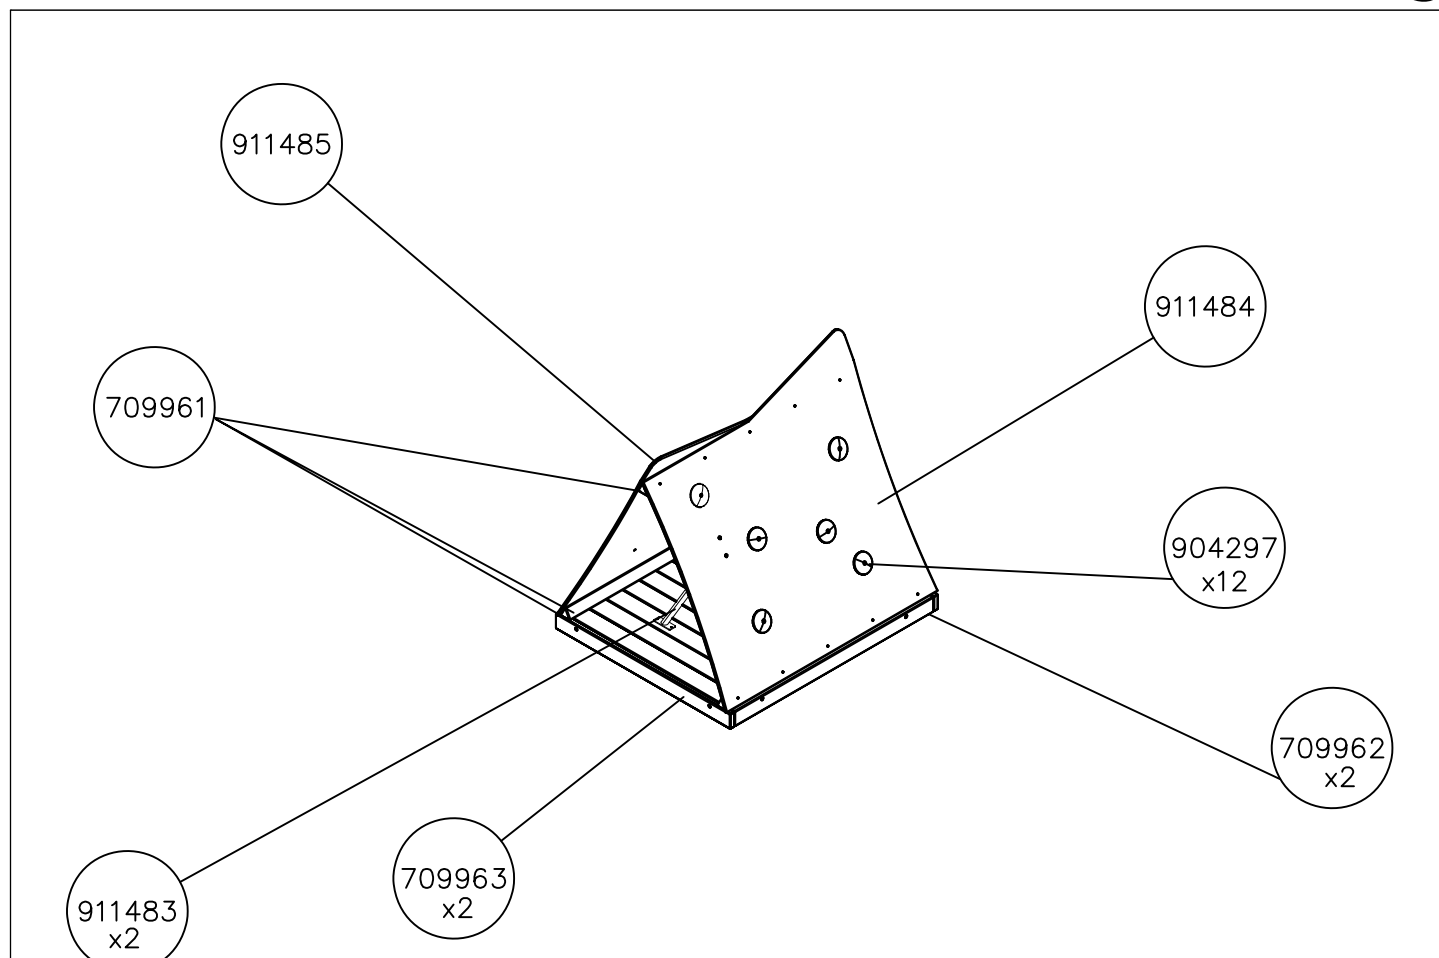
DET 7

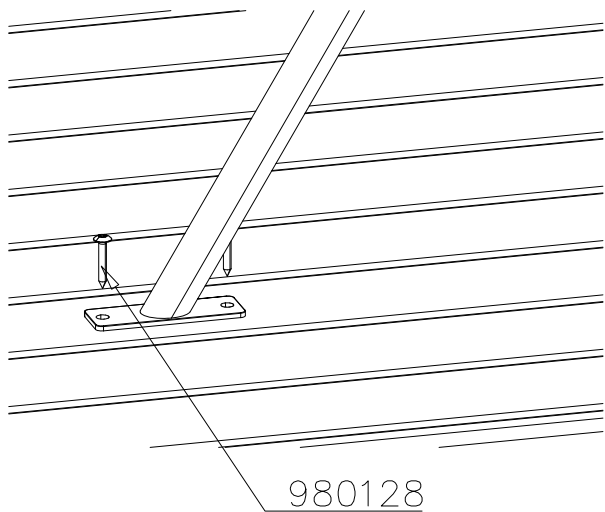

DET 8

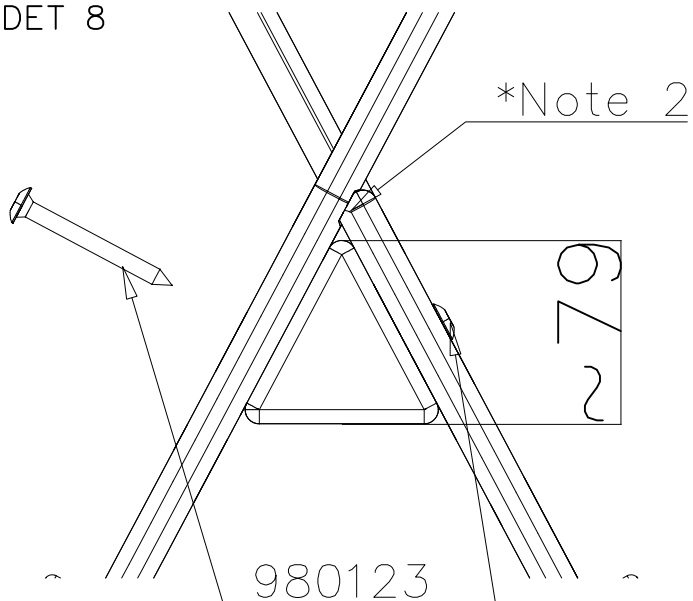

DET 9

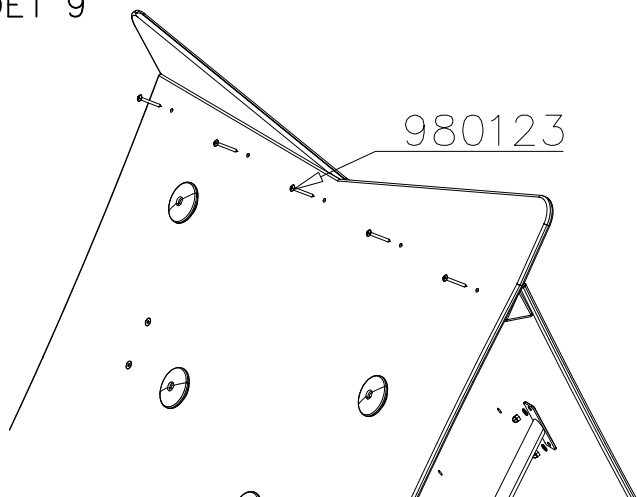

*note

Use 3x Screws (903093) evenly to attach the beam 709961 from beneath

*note 2

the plates have groove on otherside and chamfer on otherside to make a smooth joint

HUOM!

Otepalan asennus, säätö tai paikan vaihto.

Säätömahdollisuus (90°,180°,270°).

Jos asennetun otepalan suuntaa- tai paikkaa halutaan muuttaa.

Irrota otepalan kiinnityspultti ja otepala, käännä tai vaihda.

Siirrä tarvittaessa tappi oikeaan upotusreikään. Asenna avatut osat paikoilleen ja lopuksi kiinnitä muovitulppa Ø30 paikoilleen kaikkiin otekokoonpanoihin.


NOTE:

Grip positions and angles are adjustable (90°,180°270°).


Grip can be repositioned by removing the fastening bolt and pulling the grip off.







Securing pin can be repositioned when angle is changed.

After the parts are reassembled. Finish the assembly by fastening the cover plugs (Ø30).

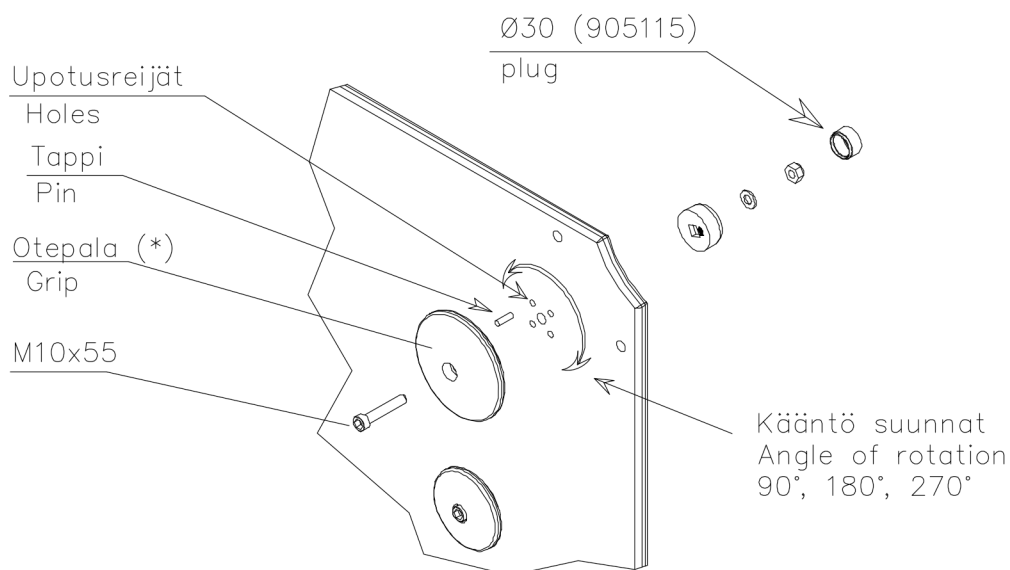


Max Falling Height

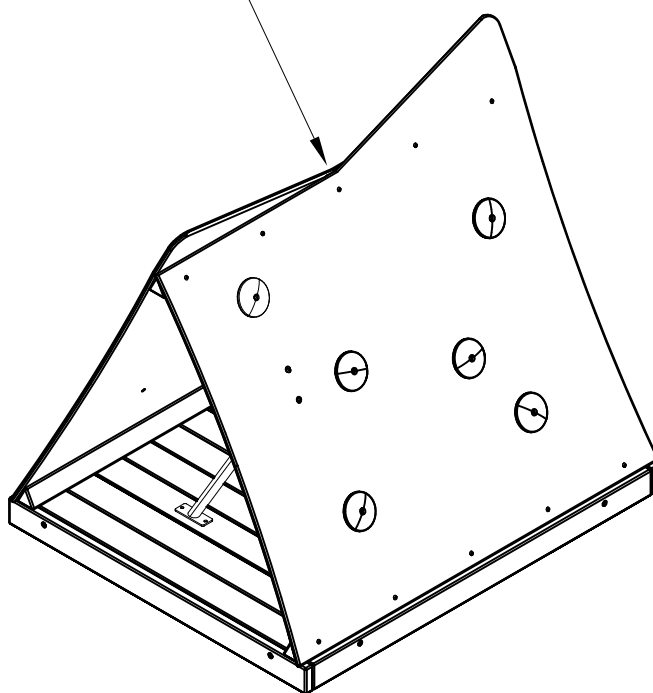


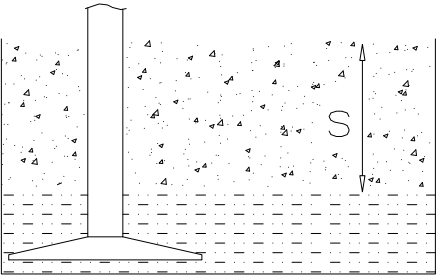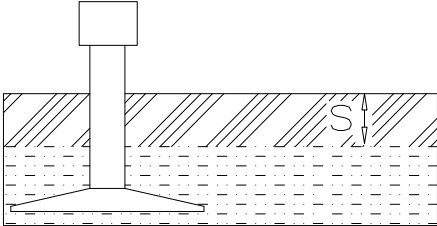
		
$h < 600$ Without movement and therefore without Impact Area	Totally hard surfaces.	E.g. concrete or asphalt 
$h < 600$ With movement e.g. rocking	Materials with very limited impact attenuating properties.	E.g. wood 
$h < 1000$	Materials with significant impact attenuating properties.	fine gravel 0–8 mm  grass  unsorted sand 
$h < 3000$	Loose fill material E.g. sand/gravel 0,25...8 mm D60/D10<3,0 Woodchips 5...30 mm bark 20...80 mm	 $\underline{S}$ 30 cm 40 cm $\underline{h}$ < 2,0 m < 3,0 m
	Syntethic granulates $\underline{S}$ 40 mm ~> 1,2...1,3 m 50 mm ~> 1,5...1,7 m 60 mm ~> 1,8...2,0 m 70 mm ~> 2,1...2,5 m Note. For accurate values, see manufacturer's instructions.	


REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

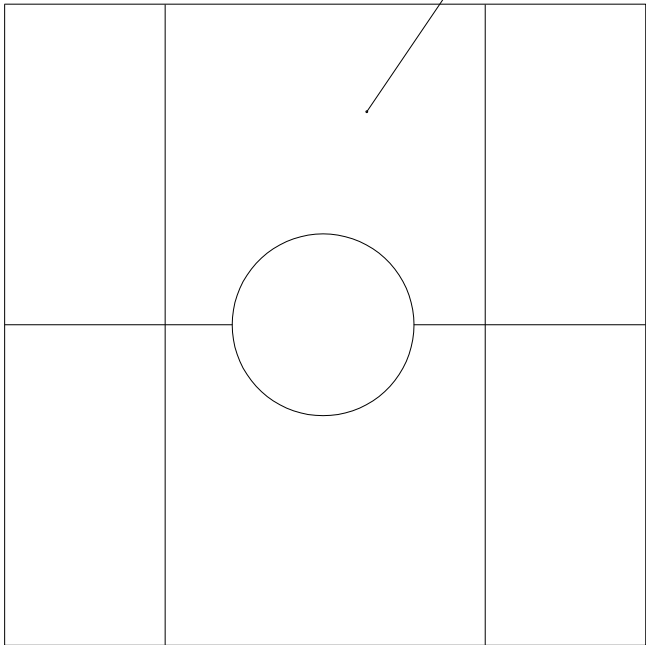

REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

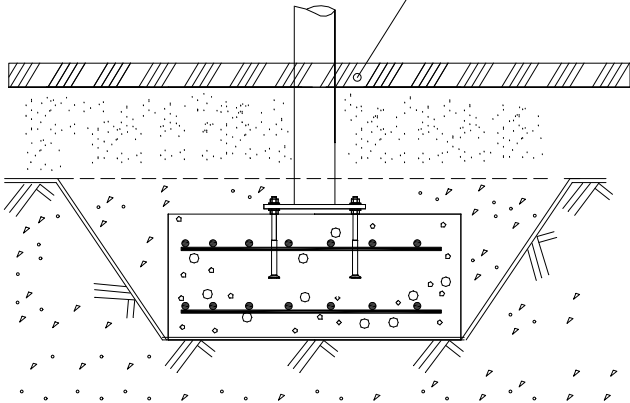

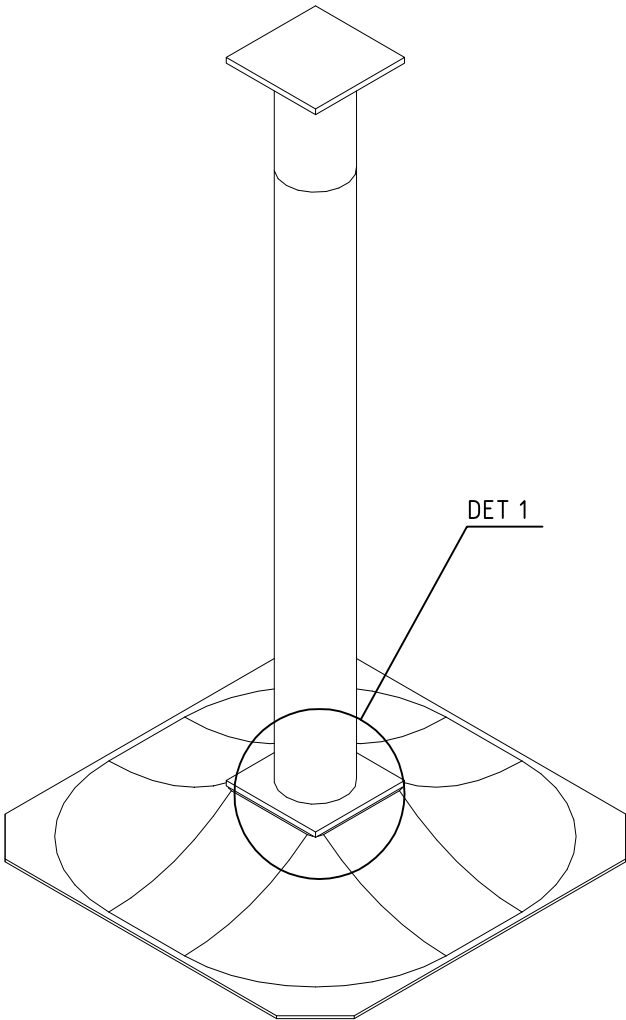

① 909511	PCS	② 909519	PCS
	1		1
③ 909637	PCS	④ 909638	PCS
	4		8
M10		Ø20/10.5	
⑤ 909639	PCS		PCS
	4		
M10x25			
	PCS		PCS
	PCS		PCS
	PCS		PCS
	PCS		PCS
	PCS		PCS

DET 1

