


Installation Instructions

Surface Fixed


Babel Drum
Page 1 of 2



Instrument Components:



Metric Conversion:
850mm/ 33 15/32"
855mm/ 33 21/32"
1.5m/ 59"

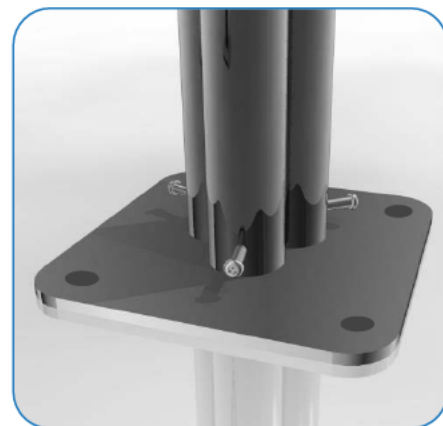

Weight of heaviest part **17.5kg** (Large Babel Drum)
Weight of heaviest part **13.4kg** (Small Babel Drum)

1. Unpack ground fixing legs 3no.

2. Lay packaging out on floor or assemble on non-abrasive surface to prevent marking of polished stainless steel.

3. Align holes on legs to holes on surface fixing (opposite end to polished domes) and secure in place using 3no. M10 x 30mm Screws provided
Tools required TX 45 Driver Bit)

4. Invert assembled frame so domed ends face upwards.

5. Place 8mm Hex Key supplied into hole in leg and lock into internal bolt.

6. Remove Black Cap opposite side of leg and keeping Hex Key in place, slide black polyurethane damper over bolt until flush with end of bolt. Repeat for other 2 legs


7. Unpack babel drum leaving black film in place to protect.

8. Align holes in side of babel drum with bolts on legs.

9. Using 8mm Hex Key screw bolts into drum to secure in place.
Use thread locking solution
All hole locations are laser cut for accuracy to ensure holes in drum align perfectly with legs.

10. Using TX40 driver provided secure M8 x 25mm security bolts into external holes in legs 3no. Use thread lock solution


11. Locate Babel Drum in desired location and mark holes to fix to desired surface.

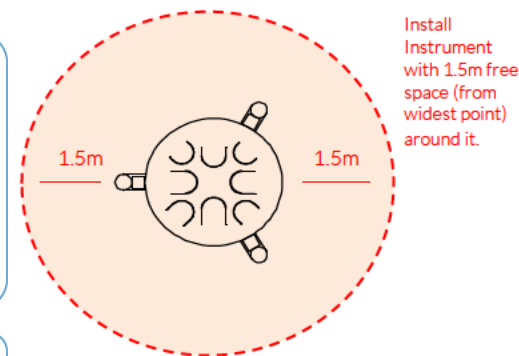


12. Fix to Surface using recommended ground anchors (Ground Anchors are not supplied)

13. Make sure all fixings are covered and secure using cover caps provided

CAUTION: Drum surface can get hot in direct sunlight, if possible install in shaded areas.

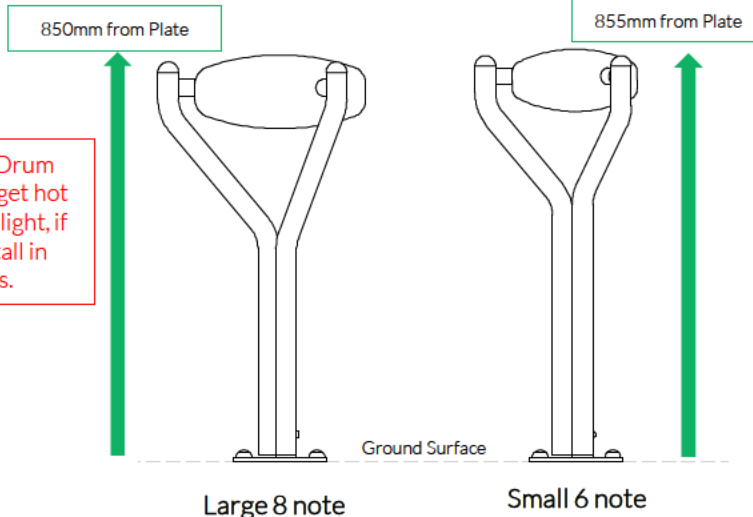

Ground Fix Components:




Ground Anchors not supplied

Spares available from
percussionplay.com or from your local distributor

22 Kg
13.4 Kg

Tools:




Surface Fixed


Babel Drum
Page 2 of 2



Instrument Components:



Thread Lock Solution
Required

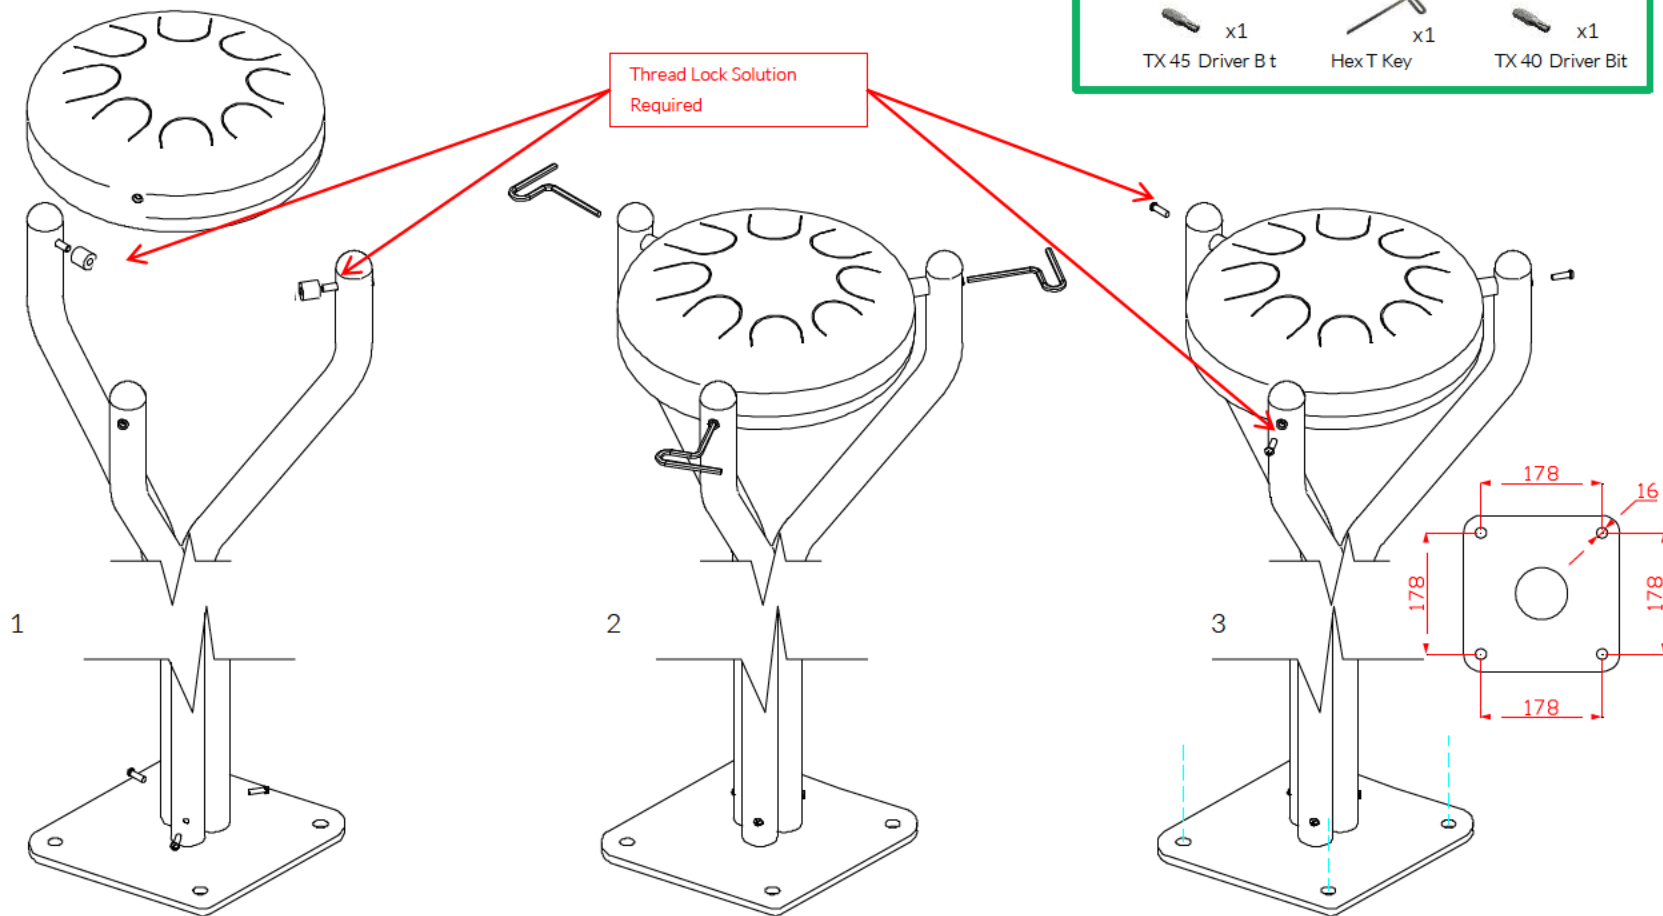


Locate the Surface fix
Plate into the leg of the
instrument.

Fix instrument to Surface
fix plate using M10
Screws and use **thread
locking solution** to
prevent fixings working
loose.

Fix Surface Plate to the
ground surface **Ground
Anchors Not provided**
cover fixings with caps
provided



Ground Fix Components:



Ground Anchors
not supplied

Spares available from
percussionplay.com or from your
local distributor

22 Kg
13.4 Kg