

**Product technical sheet**

**SOLO 1764**



3 - 12 years



2 kids



10,1 m<sup>2</sup>

**Material specification**

- Powder galvanized and powder coated steel construction of 80 x 80 mm profile;
- Moving elements of Tic Tac Toe made of durable HDPE formed by extrusion blow molding,
- Side panels made of durable HDPE plate, resistant to weather conditions,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps on top of the structure made of rubber or polypropylene,



**Facilitating disability**



easy access



integration



**Intellectual development**



manipulation



thinking





**1**  
number of interactive elements

**Product technical sheet**

**SOLO 1764**


**Product data**

Length	81 cm
Width	16 cm
Total height	156 cm
Age group	3 - 12 years
Number of users	2 kids
Safety zone	10,1 m <sup>2</sup>
Free fall height	<60 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	7,5 kg
Dimensions of the largest part	154x8x8 cm
Availability of spare parts	YES



Data is subject to change without prior notice.

**Additional information**

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

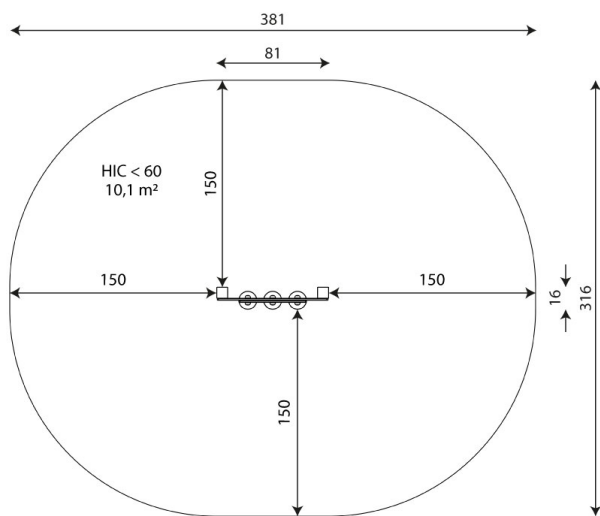

10,1 m<sup>2</sup>

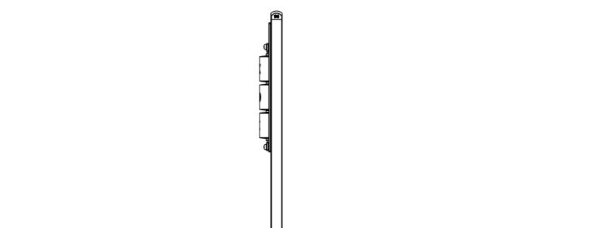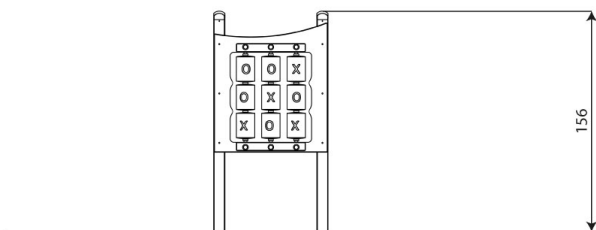

**Guarantee**

**30**

30 year guarantee - Durability of steel and stainless steel structural elements

**15**

15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10**

10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5**

5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		<60

## Product technical sheet

# SOLO 1764

### Amount of safe surface corresponding with free fall height:

HIC <60 10,1 m<sup>2</sup>

Data is subject to change without prior notice.

