




UM314PR
Bench

Olea ReBnew

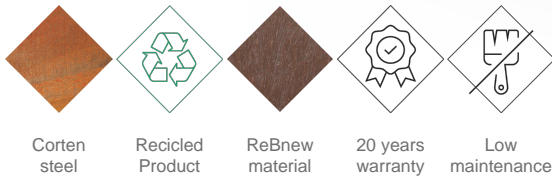

Corten steel Recycled Product ReBnew material 20 years warranty Low maintenance

Regulations and certifications:



OLEA ReBnew design Bench, total dimensions (length x height x depth) 1800x710x500 mm, made with 50x100 mm corten steel tubular legs. ReBnew profiles (BENITO's recycled polymer that is produced entirely from yellow container packaging and does not require any maintenance) with a section of 110x40x1800mm. Ecological, it comes from recycled products and is 100% recyclable. Stainless steel screws. Recommended anchoring: M10 floor fixing screws depending on the surface and project. Optional item not included: Bench with epoxy primer finish and marson polyester powder paint.

Materials & Finishes:

ReBnew: 100% recycled polymer, sturdy and durable, derived from urban, industrial, and domestic waste... It is weather-resistant, resistant to oils, acids, and seawater. It does not splinter or crack, nor does it rot or dry out.


Irregular surface finish makes the board extremely durable as it effectively hides scratches caused by vandalism. Nevertheless, surface scratches can be repaired to restore it to a like-new condition.

Scratch Repair on ReBnew

AWARDED WITH "DER BLAUE ENGEL": Product with low environmental impact throughout its lifecycle. It is awarded to products that meet criteria for reducing environmental impact in manufacturing, recycling, packaging, use, emissions, collection, and disposal. In addition to environmental criteria, it includes quality, safety, energy consumption, and other considerations. It is one of the most prestigious labels globally.

Corten steel: The material itself creates its own protection through oxidation. The oxidation process goes through different stages of coloration until it reaches a halt, which is when it obtains its final tone and stops losing rust and staining.

The oxidation process and its tone vary depending on the location where the product is installed and depending on the cycles of sun / rain / wind it is exposed to.

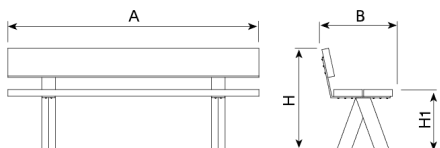

Ref.	A	B	H	H1
UM314PR	1800	500	710	440
UM314BPR	1800	390	-	440
UM314GPR	1800	610	730	450

Olea
UM314



BENITO

info@benito.com
tel. 93 852 1000

Downloads: [Project sheet](#) | [CAD](#) | [Mounting instructions](#) |